

---

# Community Detection with Graph Neural Networks

---

Joan Bruna<sup>1,2</sup> Lisha Li<sup>3</sup>

## Abstract

We study data-driven methods for community detection in graphs. This estimation problem is typically formulated in terms of the spectrum of certain operators, as well as via posterior inference under certain probabilistic graphical models. Focusing on random graph families such as the Stochastic Block Model, recent research has unified both approaches, and identified both statistical and computational signal-to-noise detection thresholds. We identify the resulting class of algorithms with a generic family of graph neural networks and show that they can reach those detection thresholds in a purely data-driven manner, without access to the underlying generative models and with no parameter assumptions. The resulting model is also tested on real datasets, requiring less computational steps and performing significantly better than rigid parametric models.

## 1. Introduction

Clustering and community detection is a fundamental unsupervised data analysis task. Given some relational observations between a set of incoming datapoints, it consists in inferring a community structure across the dataset that enables non-linear dimensionality reduction and analysis. Efficient algorithms for clustering such as k-means are heavily used across diverse data science areas. However, they rely on having the appropriate Euclidean embedding of the data.

By formulating this task as a graph partitioning problem, spectral clustering methods obtain such embedding from the leading eigenvectors of appropriate operators defined on the graph, such as the Normalized Graph Laplacian. This leads to efficient algorithms, yet there is no general procedure to construct the “correct” graph operator from the data. Another formalism is based on Probabilistic Graphical Models. By postulating the community structure as a latent, unobserved variable, authors have constructed latent gener-

ative models, using for instance pairwise Markov random fields, where inferring the community structure becomes a posterior inference over the graphical model. Whereas such models offer flexibility that lacks in spectral clustering models, Maximum-Likelihood Estimation over such graphical models is in general intractable. However, when the underlying graph has a particular ‘tree-like’ structure, Belief Propagation (BP) provides a way forward. In the specific instance of the *Stochastic Block Model* (SBM), a recent research program ((Abbe, 2017) and references therein) has bridged the gap between probabilistic and spectral methods using tools from Statistical Physics, leading to a rich understanding of statistical and computational estimation limits.

In this work, we study to what extent one can *learn* those algorithms by observing labeled pairs of graphs and labels. In other words, we observe instances of graphs together with their true community structure, and attempt to learn a mapping between graphs and their predicted communities. We propose to do so by unrolling the aforementioned estimation procedures and by using backpropagation. Our motivation is both to obtain computationally efficient estimation, and robustness against model misspecifications.

Spectral clustering algorithms consist in performing power iterations, which are also alternating between localized linear operators in the graph, point-wise nonlinearities and normalization. This algorithm can therefore be “unrolled” and recast as a neural network, similarly as in (Gregor & LeCun, 2010) with sparse coding. In our scenario, the resulting neural network for the community detection task is a graph neural network (GNN) (Scarselli et al., 2009; Bronstein et al., 2017). Inspired by the works that assimilate efficient Belief Propagation algorithms with specific perturbations of the spectrum of the Graph Laplacian, we propose key modifications to GNNs that provide us with a robust model that can operate well under scenarios where standard spectral clustering methods fail. Whereas spectral approximations of Belief Propagation can be readily approximated with neural networks defined on the original graph, the message-passing rules are naturally expressed on the line graph determined by the edge adjacency structure. We show how that the generalization of GNNs to operate on such graphs brings estimation improvements.

We first study our GNN model in the Stochastic Block Model, for which the computational and information-

<sup>1</sup>Courant Institute of Mathematical Sciences, NYU <sup>2</sup>Center for Data Science, NYU <sup>3</sup>Amplify Partners. Correspondence to: Joan Bruna <bruna@cims.nyu.edu>.

theoretic detection regimes and corresponding algorithms are well-known. We show that our network learns to reach those detection thresholds with no explicit knowledge of the model, and with improved computational efficiency. We also study community detection on the Geometric Block Model, a recently proposed model that exhibits more cycles than the SBM, thus making Belief-Propagation less efficient. Next, we demonstrate the applicability of our framework on real-world community detection problems, by showing that our data-driven model is able to outperform existing community detection algorithms based on parametric generative families.

To summarize, our main contributions are:

- We propose to use graph neural networks to perform data-driven spectral analysis by unrolling power iterations, and propose an extension of GNNs that operate on the line graph.
- We show that on the Stochastic Block-Model we reach detection thresholds in a purely data-driven fashion.
- We show how our model can be applied to real-world datasets, leading to state-of-the-art community detection results.

## 2. Background and Problem Setup

In this section, we describe our problem setup and how it relates to spectral clustering and probabilistic graphical inference.

### 2.1. Graph Min-Cuts and Spectral Clustering

We consider graphs  $G = (V, E)$ , modeling a system of  $N = |V|$  elements presumed to exhibit some form of community structure. The adjacency matrix  $A$  associated with  $G$  is the  $N \times N$  binary matrix such that  $A_{i,j} = 1$  whenever  $(i, j) \in E$ . We assume for simplicity undirected graphs, yielding symmetric adjacency matrices. The community structure is encoded in a discrete label vector  $s : V \rightarrow \{1, K\}$  that assigns a community label to each node, and the goal is to estimate  $s$  from observing the adjacency matrix.

In the setting of binary, associative communities, where  $s(i) = \pm 1$ , two nodes  $i, j$  with  $s(i) = s(j)$  are more likely to be connected ( $A_{i,j} = 1$ ) than two nodes  $i, j$  with  $s(i) \neq s(j)$ . Thus a quantity of the form

$$\sum_{i,j} (1 - s(i)s(j))A_{i,j}$$

measures the cost associated with *cutting* the graph between communities encoded by  $s$  that we wish to minimize under appropriate constraints (Newman, 2006). Note that  $\sum_{i,j} A_{i,j} = s^T D s$ , with  $D = \text{diag}(A\mathbf{1})$  (called the degree matrix), so the cut cost can be expressed as a positive

semidefinite quadratic form

$$\min_{s(i)=\pm 1} s^T (D - A) s = s^T \Delta s$$

that we wish to minimize. This shows a fundamental connection between the community structure and the spectrum of certain linear operators of the graph, which provides a powerful and stable relaxation of the discrete combinatorial optimization problem of estimating the community labels for each node. In the case of the graph Laplacian  $\Delta = D - A$ , its eigenvector associated with the smallest eigenvalue is trivial, but its Fiedler vector (the eigenvector associated with the second smallest eigenvalue) reveals important community information of the graph (Newman, 2006) under appropriate conditions, and is associated with the graph conductance (Spielman, 2015) under certain normalization schemes.

For a given linear operator  $\mathcal{L}(A)$  extracted from the graph (that we assume symmetric), we are thus interested in extracting eigenvectors at the edge of its spectrum. A particularly simple algorithmic framework is given by the power iteration method. Indeed, the Fiedler vector of  $\mathcal{L}(A)$  can be obtained by first extracting the leading eigenvector  $v$  of  $\tilde{A} = \|\mathcal{L}(A)\| - \mathcal{L}(A)$ , and then iterating

$$y^{(n)} = \tilde{A}w^{(n-1)}, \quad w^{(n)} = \frac{y^{(n)} - \langle y^{(n)}, v \rangle v}{\|y^{(n)} - \langle y^{(n)}, v \rangle v\|}.$$

Unrolling power iterations and recasting the resulting model as a trainable neural network is akin to the LISTA (Gregor & LeCun, 2010) sparse coding model, which unrolled iterative proximal splitting algorithms.

Despite the appeal of graph Laplacian spectral approaches, it is well known (Krzakala et al., 2013) that these methods fail in sparsely connected graphs. Indeed, in such scenarios, the eigenvectors of graph Laplacians concentrate on nodes with dominant degree, losing their ability to correlate with community structure. In order to overcome this important limitation, authors have resorted to ideas inspired from statistical physics, as explained next.

### 2.2. Probabilistic Graphical Models and Belief-Propagation

Graphs with labels on nodes and edges can be cast as a graphical model where the aim of clustering is to optimize label agreement. This can be seen as a posterior inference task. If we simply assume the graphical model is a Markov Random Field (MRF) with trivial compatibility functions for cliques greater than 2, the probability of a label configuration  $\sigma$  is given by

$$\mathbb{P}(\sigma) = \frac{1}{Z} \prod_{i \in V} \phi_i(\sigma_i) \prod_{ij \in E} \psi_{ij}(\sigma_i, \sigma_j). \quad (1)$$

Generally, computing marginals of multivariate discrete distributions is exponentially hard. For instance, in the case

of  $\mathbb{P}(\sigma_i)$  we are summing over  $|X|^{n-1}$  terms (where  $X$  is the state space of discrete variables). But if the graph is a tree, we can factorize the MRF more efficiently to compute the marginals in linear time via a dynamic programming method called the sum-product algorithm, also known as belief propagation (BP). An iteration of BP is given by

$$b_{i \rightarrow j}(\sigma_i) = \frac{1}{Z_{i \rightarrow j}} \phi_i(\sigma_i) \prod_{k \in \delta_{in j}} \sum_{\sigma_k \in X} \psi_{ik}(\sigma_i, \sigma_k) b_{k \rightarrow i}(\sigma_k). \quad (2)$$

The beliefs  $(b_{i \rightarrow j}(\sigma_i))$  are interpreted as the marginal distributions of  $\sigma_i$ . Fixed points of BP can be used to recover marginals of the MRF above. In the case of the tree, the correspondence is exact:  $\mathbb{P}_i(\sigma_i) = b_i(\sigma_i)$ . Some sparse graph, like the Stochastic Blockmodel with constant degree (Mossel et al., 2016) are locally similar to trees for such an approximation to be successful. BP approximates the MLE solutions but convergence is not guaranteed in graphs that are not trees. Furthermore, in order to apply BP, we need a generative model and the correct parameters of the model. If unknown, the parameters can be derived using expectation maximization, further adding complexity and instability to the method since iterations may learn parameters for which BP does not converge.

### 2.3. Non-backtracking operator and Bethe Hessian

The BP equations have a trivial fixed-point where every node takes equal probability in each group. Linearizing the BP equation around this point is equivalent to spectral clustering using the non-backtracking matrix (NB), a matrix defined on the edges of the graph that indicates whether two edges are adjacent and do not coincide. Spectral clustering using NB gives significant improvements over spectral clustering with versions of the Laplacians (L) and the adjacency matrix (A); High degree fluctuations drown out the signal of the informative eigenvalues in the case of A and L, whereas NB's eigenvalues are confined to a disk in the complex plane, so its eigenvalues corresponding to community structure lay outside the disk and are easily distinguishable.

NB matrices are still not optimal in that they are matrices on the edge set, and are not symmetric (so cannot enjoy tools of numerical linear algebra for symmetric matrices). Recently Saade et al. (Saade et al., 2014) showed that a spectral method can do as well as BP in this regime, using the Bethe Hessian operator given by  $BH(r) := (r^2 - 1)\mathbb{I} - rA + D$  (where  $r$  is a scalar value). This is due to a one-to-one correspondence between the fixed points of BP and the stationary points of the Bethe free energy (corresponding Gibbs energy of the Bethe approximation) (Yedidia et al., 2003a). The Bethe Hessian is a scaling of the Hessian of the Bethe free energy at an extrema corresponding to the trivial fixed point of BP. Negative eigenvalues of  $BH(r)$  correspond to phase transitions in the Ising model where new clusters become identifiable. This all gives theoretical motivation for why  $[\mathbb{I}, D, A]$  defined in Section 3 are a good

family of generators to do spectral clustering on. In the case of the SBM, they generate the Bethe Hessian which can achieve community detection down to the information theoretic threshold. The GNN is capable of expressing spectral approximations of complicated functions of  $[\mathbb{I}, D, A]$ , and performing nonlinear power method iterations in order to infer global structure (for instance community structure). Furthermore, unlike belief propagation, the method does not require a generative model, oftentimes requires a lot of statistical analysis to motivate and is exposed to model misspecifications when deployed on real data. Instead, our framework finds structure in a data driven way, learning it from the available training data.

## 3. Multiscale Graph Neural Networks

### 3.1. Power Graph Neural Networks

The Graph Neural Network (GNN), introduced in (Scarselli et al., 2009) and later simplified in (Li et al., 2015; Duvenaud et al., 2015; Sukhbaatar et al., 2016) is a flexible neural network architecture that is based on local operators on a graph  $G = (V, E)$ . We start by briefly reviewing the generic GNN architecture, and next describe our modifications to make it suitable to our interests.

Given some input signal  $F \in \mathbb{R}^{|V| \times d}$  on the vertices of  $G$ , we consider graph intrinsic linear operators that act locally on this signal: The *degree operator* is the linear map  $D : F \mapsto DF$  where  $(DF)_i := \text{deg}(i) \cdot F_i$ ,  $D(F) = \text{diag}(A\mathbb{1})F$ . The *adjacency operator* is the map  $A : F \mapsto AF$  where  $(AF)_i := \sum_{j \sim i} F_j$ , with  $i \sim j$  iff  $(i, j) \in E$ . Similarly,  $J$ -th powers of  $A$  encode  $J$ -hop neighborhoods of each node, and allow us to combine and aggregate local information at different scales. We consider in this work the *power graph* adjacency  $A_j = \min(1, A^{2^j})$ , which encodes  $2^j$ -hop neighborhoods into a binary graph. We also allow a channel to broadcast information globally giving GNN the ability to recover average degrees, moments of degrees via  $(U(F))_i = \frac{1}{|V|} \sum_j F_j$ .

We consider a multiscale GNN layer that receives as input a signal  $x^{(k)} \in \mathbb{R}^{|V| \times d_k}$  and produces  $x^{(k+1)} \in \mathbb{R}^{|V| \times d_{k+1}}$  as

$$\begin{aligned} x^{(k+1)}_{i,l} &= \rho[\theta_{1,l}^{(k)} x_i + \theta_{2,l}^{(k)} (Dx)_i + \theta_{3,l}^{(k)} (Ux)_i \\ &\quad + \sum_{j=0}^{J-1} \theta_{4+j,l}^{(k)} (A^{2^j} x)_i], \quad l = 1, \dots, d_{k+1}/2, \\ x^{(k+1)}_{i,l} &= \theta_{1,l}^{(k)} x_i + \theta_{2,l}^{(k)} (Dx)_i + \theta_{3,l}^{(k)} (Ux)_i \\ &\quad + \sum_{j=0}^{J-1} \theta_{4+j,l}^{(k)} (A^{2^j} x)_i, \quad l = d_{k+1}/2 + 1, \dots, d_{k+1}, \end{aligned} \quad (3)$$

where  $\Theta = \{\theta_1^{(k)}, \dots, \theta_{J+3}^{(k)}\}$ ,  $\theta_s^{(k)} \in \mathbb{R}^{d_{k+1} \times d_k}$  are trainable parameters and  $\rho(\cdot)$  is a point-wise nonlinearity, chosen

in this work to be  $\rho(z) = \max(0, z)$ . We thus consider a layer with linear “residual connections” (He et al., 2016), to both ease with the optimization when using large number of layers, but also to give the model the ability to perform power iterations. Since the spectral radius of the learnt linear operators in (3) can grow as the optimization progresses, the cascade of gnn layers can become unstable to training. In order to mitigate this effect, we consider spatial batch normalization (Ioffe & Szegedy, 2015) at each layer.

As explained in Section 2.1, the Krylov subspace generated by the graph Laplacian (Defferrard et al., 2016) is not sufficient in this case to operate well in the sparse regime, as opposed to the generators  $\{\mathbb{I}, D, A\}$ . The expressive power of each layer is increased by adding multiscale versions of  $A$ , although this benefit comes at the cost of computational efficiency, especially in the sparse regime. The network depth is chosen to be of the order of the graph diameter, so that all nodes obtain information from the entire graph. In sparse graphs with small diameter, this architecture offers excellent scalability and computational complexity. Indeed, in many social networks diameters are constant (due to hubs), or  $\sim \log(|V|)$ , as in the Stochastic Block-Model in the constant average degree regime (Riordan & Wormald, 2010). This results in a model with computational complexity of the order of  $\sim |V| \log(|V|)$ , making it amenable to large-scale graphs.

In our setup, batch normalization not only prevents gradient blowup, but also performs the orthogonalisation relative to the constant vector, which is associated with the smallest eigenvector of the graph operator whose spectrum contains community information. This reinforces the analogy between cascading layers of (3) and the power iterations to obtain the Fiedler vector of such operator. Indeed, if one wants to extract the Fiedler vector of a matrix  $M$ , whose smallest eigenvector is known to be  $v$ , one can do so by performing power iterations on  $\tilde{M} = \|M\|_{\mathbb{I}} - M$  as

$$y^{(n+1)} = \tilde{M}x^{(n)}, \quad x^{(n+1)} = \frac{y^{(n+1)} - v^T v y^{(n+1)}}{\|y^{(n+1)} - v^T v y^{(n+1)}\|}.$$

If  $v$  is a constant vector, then the normalization above is precisely performed within the Batch Normalization step.

### 3.2. Label permutation invariant loss

We bootstrap the network by considering the input signal  $x^{(0)} = \text{deg}$ . After performing  $K$  steps of (3), we use the resulting node-level features to predict the community of each node. Let  $\mathcal{C} = \{c_1, \dots, c_C\}$  denote the possible community labelings that each node can take.

Consider first the case where communities do not overlap:  $C$  equals the number existing communities. We define the network output at each node using standard softmax, computing the conditional probability that node  $i$  belongs to commu-

nity  $c$ :  $o_{i,c} = \frac{e^{\langle \theta_c^{(o)}, x_{i,\cdot}^{(K)} \rangle}}{\sum_{c'} e^{\langle \theta_{c'}^{(o)}, x_{i,\cdot}^{(K)} \rangle}}$ ,  $c = 1 \dots C$ . Let  $G = (V, E)$

be the input graph and let  $y \in \mathcal{C}^V$  be the ground truth community structure. Since community belonging is defined up to global label changes in communities, we define the loss associated with a given graph instance as

$$\ell(\theta) = \inf_{\sigma \in S_C} - \sum_{i \in V} \log o_{i, \sigma(y_i)}, \quad (4)$$

where  $S_C$  denotes the permutation group of  $C$  elements. In our experiments we considered examples with small number of communities  $C = 2, 3, 4$ , but general scenarios, where  $C$  is suspected to be much larger, might make the evaluation of (4) over the permutation group of  $C$  elements impractical. Two possible solutions can be considered: first, given the inferred community memberships  $o_{i,c}$ , we first extract the permutation subgroup of size  $\tilde{C}$ ! determined by the  $\tilde{C}$  true communities where the model produces the highest uncertainty, measured with the entropy  $H(o; c) = - \sum_{y_i=c} o_{i,c} \log o_{i,c}$ . Then we replace (4) with

$$\tilde{\ell}(\theta) = \inf_{\sigma \in S_{\tilde{C}}} - \sum_{i \in V; y_i \in \tilde{C}} \log o_{i, \sigma(y_i)} + \sum_{c \notin \tilde{C}} H(o; c). \quad (5)$$

Another potential alternative can be used when there is a hierarchical community structure, that would allow us to train each level of the hierarchy with (4) separately. Finally, if we are in a setup where nodes can belong to multiple communities, we simply redefine  $\mathcal{C}$  to include subsets of communities instead of just singletons, and modify the permutation group  $S_C$  accordingly.

### 3.3. GNN on Line Graphs

For graphs that have few cycles, posterior inference can be remarkably approximated by loopy Belief Propagation (Yedidia et al., 2003b). As described in Section 2.2, the message-passing rules are defined over the edge adjacency graph; see equation 2. Although its second-order approximation around the critical point can be efficiently approximated with a power method over the original graph, a data-driven version of BP requires accounting for the non-backtracking structure of the message-passing. In this section we describe how to upgrade the GNN model so that it can learn and exploit non-backtracking operators.

The line graph  $L(G)$  is the graph representing by the edge adjacency structure of  $G$ ; that is, if  $G = (V, E)$  is an undirected graph, then the vertices of  $L(G)$  are the edges in  $E$ , and two nodes  $e_{i,j}, e_{i',j'}$  are connected if they intersect in a node of  $G$ :  $i = i'$  or  $i = j'$  or  $j = i'$  or  $j = j'$ . The message-passing rules of BP are thus naturally expressed as a diffusion in the line graph  $L(G)$  with specific choice of nonlinearity, given by exponentials and logarithms. A natural extension of the GNN architecture presented in Section

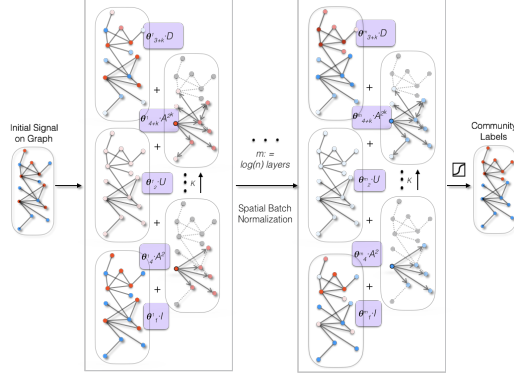


Figure 1. We input an arbitrary signal (can be random or can be informative) and output a classification of the nodes. The colour saturation representative of the magnitude of the signal, whereas the colour difference encode different label classes (red versus blue in this case).

3.1 is thus to consider a second GNN defined on  $L(G)$ , generated by the corresponding adjacency  $A_{L(G)}$  and degree  $D_{L(G)}$  operators. This effectively defines *edge features* that are diffused and updated according to the edge adjacency of  $G$ . Edge and node features can be combined at each layer using the edge indicator matrix  $P \in \{0, 1\}^{|V| \times |E|}$ , defined as  $P_{i,(i,j)} = P_{j,(i,j)} = 1$  and 0 otherwise. Dropping the skip linear connections for ease of exposition, the resulting model becomes

$$\begin{aligned}
 x^{(k+1)}_{i,l} &= \rho[\theta_{1,l}^{(k)} x_i + \theta_{2,l}^{(k)} (Dx)_i + \theta_{3,l}^{(k)} (Ux)_i \\
 &+ \sum_{j=0}^{J-1} \theta_{4+j,l}^{(k)} (A^{2^j} x)_i] + \delta^{(k)} P y^{(k)}, \\
 y^{(k+1)}_{i',l'} &= \rho[\gamma_{1,i',l'}^{(k)} y_{i'}^{(k)} + \gamma_{2,i',l'}^{(k)} (D_{L(G)} y^{(k)})_{i'} + \gamma_{3,i',l'}^{(k)} (U_{L(G)} y^{(k)})_{i'} \\
 &+ \sum_{j=0}^{J-1} \gamma_{4+j,i',l'}^{(k)} (A_{L(G)}^{2^j} y^{(k)})_{i'}] + \tilde{\delta}^{(k)} [P^\top x^{(k)}]_{i'}.
 \end{aligned}$$

The BP equations introduce a directed flow of information in the line graph to account for non-backtracking paths. In our model, since the edge features contain several channels, such distinction can emerge automatically, but potentially the model can learn more general message-passing rules that mix incoming and outgoing messages as needed.

Several authors have proposed combining node and edge feature learning (Gori et al., 2005; Gilmer et al., 2017; Velickovic et al., 2017), although we are not aware of works that considered the edge adjacency structure provided by the line graph. For graph families with constant average degree  $\bar{d}$ , the line graph has size  $|E| = \frac{\bar{d}|V|}{2}$  of the same order, making this model feasible from the computational point of view. The line graph construction can be iterated with  $L(L(G)), L(\dots L(G) \dots)$  to yield a *graph hierarchy*, that captures high-order interactions between the elements of  $G$ .

Such hierarchical construction relates to other recent efforts to generalize GNNs (Kondor et al., 2018).

## 4. Related Work

The GNN was first proposed in (Scarselli et al., 2009). (Bruna et al., 2013) generalized convolutional neural networks on general undirected graphs by using the graph Laplacian’s eigenbasis. This was the first time the Laplacian operator was used in a neural network architecture to do classification on graph input. (Defferrard et al., 2016) considers a symmetric Laplacian generator to define a multiscale GNN architecture, demonstrated on classification tasks. Similarly, (Kipf & Welling, 2016) uses a similar generator as effective embedding mechanisms for graph signals, applied on semi-supervised tasks. This is the closest application of GNNs to our current contribution, which has been recently updated in numerous works (Hamilton et al., 2017), and references therein. However, we highlight that semi-supervised learning requires bootstrapping the estimation with a subset of labeled nodes, and is mainly interested in generalization within a single, fixed graph. On the other hand, our setup treats clustering across a distribution of input graphs and assumes no initial labeling.

(Gilmer et al., 2017) interpreted the GNN architecture as learning a message passing algorithm. As mentioned in our setup, that is a natural relaxation of the inference problem on the MRF, but does not tell the whole story with respect to clustering and the need for generators  $[L, D, A]$  in the GNN layers. The present work deals with graphs that are far sparser than previous applications of neural networks on graphs. We are able to be competitive with spectral methods specifically designed to work up to the information theoretic regime that cannot be achieved with previous GNN implementations.

(Zhang, 2016) works on data regularization for clustering and rank estimation and is also motivated by success of using Bethe-Hessian-like perturbations to improve spectral methods on sparse networks. They find good perturbations via matrix perturbations, and also had success on the Stochastic Blockmodel. Jure and his coauthors have done a lot of work in community detection in curating benchmark datasets, quantifying the quality of these datasets (Yang & Leskovec, 2012a), and also in making new algorithms for community detection by fitting data to newly designed generative models (models that exhibit similar statistical structure learned from their analysis of the aforementioned datasets) (Yang & Leskovec, 2012b).

## 5. The Stochastic Block Model

We briefly review the main properties needed in our analysis, and refer the interested reader to (Abbe, 2017) for an excellent recent review. The Stochastic Blockmodel (SBM) is a random graph model denoted by  $SBM(n, p, q, K)$ . Implicitly there is an  $F : V \rightarrow \{1, \dots, K\}$  associated with each SBM graph, which assigns community labels to each vertex. One obtains a graph from this generative model by starting with  $n$  vertices and connecting any two vertices  $u, v$  independently at random with probability  $p$  if  $F(v) = F(u)$ , and with probability  $q$  if  $F(v) \neq F(u)$ . We say the SBM is *balanced* if the communities are the same size. Let  $\bar{F}_n : V \rightarrow \{1, \dots, K\}$  be our predicted community labels for  $SBM(n, p, q, K)$ ,  $\bar{F}_n$ 's give *exact recovery* on a sequence  $\{SBM(n, p, q)\}_n$  if  $\mathbb{P}(F_n = \bar{F}_n) \rightarrow_n 1$ , and give *detection*  $\exists \epsilon > 0 : \mathbb{P}(|F_n - \bar{F}_n| \geq 1/k + \epsilon) \rightarrow_n 1$  (i.e.  $\bar{F}_n$ 's do better than random guessing).

It is harder to tell communities apart if  $p$  is close to  $q$  (if  $p = q$  we just get an Erdős Renyi random graph, which has no communities). In the two community case, It was shown that exact recovery is possible on  $SBM(n, p = \frac{a \log n}{n}, q = \frac{b \log n}{n})$  if and only if  $\frac{a+b}{2} \geq 1 + \sqrt{ab}$  (Mossel et al., 2014; Abbe et al., 2014). For exact recovery to be possible,  $p, q$  must grow at least  $O(\log n)$  or else the sequence of graphs will not to be connected, and thus vertex labels will be underdetermined. There is no information-computation gap in this regime, so there are polynomial time algorithms when recovery is possible ((Abbe, 2017)(Mossel et al., 2014)). In the much sparser regime of constant degree SBM ( $n, p = \frac{a}{n}, q = \frac{b}{n}$ ), detection is the best we hope for. The constant degree regime is also of most interest to us for real world applications, as most large datasets have bounded degree and are extremely sparse. It is also a very challenging regime; spectral approaches using the Laplacian in its various (un)normalized forms and the adjacency matrix, as well as SDP methods cannot detect communities in this regime (Abbe, 2017) due to large fluctuations in the degree distribution that prevent eigenvectors from concentrating on the clusters.

In the constant degree regime with balanced  $k$  communities, the Kesten-Stigum threshold is given by  $SNR := (a - b)^2 / (k(a + (k + 1)b))$  (Abbe, 2017). It has been shown for  $k = 2$  that  $SNR = 1$  is both the information theoretic and efficient computational threshold where belief propagation (BP) via a polynomial time algorithms. For  $k \geq 4$  a gap emerges between the information theoretic threshold and computational one. It's conjectured that no polynomial time algorithm exist for  $SNR < 1$ , while a BP algorithm works for  $SNR > 1$  (Abbe, 2017). The existence of the gap was shown by (Abbe, 2017) by proving a non-polynomial algorithm can do detection for some  $SNR < 1$ .

## 6. Experiments

### 6.1. GNN Performance Near Information Theoretic Threshold of SBM

Our performance measure is the overlap between predicted ( $\bar{F}$ ) and true labels ( $F$ ), which quantifies how much better than random guessing a predicted labelling is. The overlap is given by  $(\frac{1}{n} \sum_u \delta_{F(u), \bar{F}(u)} - \frac{1}{k}) / (1 - \frac{1}{k})$  where  $\delta$  is the Kronecker delta function, and the labels are defined up to global permutation. The GNNs were all trained with 30 layers, 10 feature maps and  $J = 3$  in the middle layers and  $n = 1000$ . We used Adamax (Kingma & Ba, 2014) with learning rate 0.001<sup>1</sup> We consider two learning scenarios. In the first scenario, we train parameters  $\theta$  conditional on  $a$  and  $b$ , by producing 6000 samples  $G \sim SBM(n = 1000, a_i, b_i, k = 2)$  for different pairs  $(a_i, b_i)$  and estimating the resulting  $\theta(a_i, b_i)$ . In the second scenario, we train a single set of parameters  $\theta$  from a sample of 6000 samples

$$G \sim SBM(n = 1000, a = k\bar{d} - b, b \sim \text{Unif}(0, \bar{d} - \sqrt{\bar{d}}), k = 2),$$

where the average degree  $\bar{d}$  is either fixed constant or also randomized with  $\bar{d} \sim \text{Unif}(1, t)$ . This training set is very important as it shows our GNN is not just approximating the BH spectral method since the optimal  $r$  is not constant in this dataset. Instead, the model's competitive performance in this regime shows that the GNN is able to learn a higher dimensional representation of the optimal  $r$  as a function of the data.

Our GNN model is either competitive with BH or beats BH, which achieves the state of the art along with BP (Saade et al., 2014), despite not having any access to the underlying generative model (especially in cases where GNN was trained on a mixture of SBM and thus must be able to generalize the  $r$  parameter in BH). They all beat by a wide margin spectral clustering methods using the symmetric Laplacian (Ls) and power method (pm) applied to  $\|BH\| - BH$  using the same number of layers as our model. Thus GNN's ability to predict labels goes beyond approximating spectral

<sup>1</sup>Code will be publicly released at ????. ????. ????

decomposition via learning the optimal  $r$  for  $BH(r)$ . The model architecture allows it to learn a higher dimensional function of the optimal perturbation of the multiscale adjacency basis, as well as nonlinear power iterations, that amplify the informative signals in the spectrum; In a data driven way it can generalize the problem without needing to study a generative model.

## 6.2. Computational-to-Statistical Thresholds in the SBM

The previous section showed that for small number of communities ( $k \leq 4$ ), the GNN-based model is able to reach the information theoretic (IT) threshold. In such regimes, it is known (Abbe, 2017) that BP provably reaches such IT threshold. The situation is different for  $k > 4$ , where it is conjectured that a computational-to-statistical gap exists between the theoretical performance of MLE estimators and any polynomial-time estimation procedure (Decelle et al., 2011). In this context, one can use the GNN model to search the space of BP generalizations, and attempt to improve the detection performance of BP for signal-to-noise ratios falling within the computational-to-statistical gap. Table 2 presents results for the 5-community disassociative case, with  $p = 0$  and  $q = 18$ . This amounts to solving a graph coloring problem in a sparse regime, which falls above the IT threshold but below the regime where BP is able to detect (Decelle et al., 2011), asymptotically as  $n \rightarrow \infty$ . Our line graph implementation, although not improving over BP, matches its performance in a purely data-driven way, opening the door for future model exploration, possibly using higher order graph hierarchies. An intrinsic limitation of our approach is that we train our models for finite size  $n$ , which enable detection results above the random chance, even for methods (such as BP) that are known to fail asymptotically. That said, it is possible to infer asymptotic detection capabilities for finite  $n$  by measuring the fluctuations around the average detection, as in the planted clique problem (Karp, 1976); this is left for future work.

## 6.3. Geometric Block Model

The success of Belief-Propagation on the Stochastic Block Model relies on its locally hyperbolic properties, which make it tree-like with high probability. This behavior is completely different if one considers random graphs with locally Euclidean geometry. The Geometric Block Model (Sankararaman & Baccelli, 2018) is a random graph generated as follows. One starts by sampling  $n$  iid points  $x_1, \dots, x_n$  from a Gaussian mixture model given by means  $\mu_1, \dots, \mu_k \in \mathbb{R}^d$  at distance  $S$  apart and identity covariances. The labels correspond to which Gaussian each sample belongs to. We draw an edge between two nodes  $i, j$  if  $\|x_i - x_j\| \leq T/\sqrt{n}$ . Due to the triangle inequality, the model contains a large number of short cycles, impacting the performance of loopy belief propagation. This moti-

vates other estimation algorithms based on motif-counting (Sankararaman & Baccelli, 2018) that require knowledge of the model likelihood function. Table 3 shows the performance of the basic GNN model on the binary GBM model, obtained with  $d = 2$ ,  $n = 1000$ ,  $T = 5\sqrt{2}$  and varying  $S$ , and its comparison with several spectral methods. We verify that the GNN model, thanks to its added flexibility and the multiscale nature of its generators, is able to significantly outperform both BH and Laplacian models. In this case, we found that the line graph version did not produce significant improvements.

## 6.4. Real Datasets from SNAP

We train the GNN on real datasets with community labels provided by SNAP. These datasets have ground truth community labels ranging from social networks to hierarchical co-purchasing networks. Since the data is diverse, performance on these datasets illustrates how well the GNN can learn a data driven spectral approach for each graph. We obtain the training set for the GNN as follows. For each SNAP dataset, we start by focusing only on the 5000 top quality communities provided by the dataset. We then identify edges  $(i, j)$  that cross at least two different communities. For each of such edges, we consider the two largest communities  $C_1, C_2$  such that  $i \notin C_2$  and  $j \notin C_1$ ,  $i \in C_1, j \in C_2$ , and extract the subgraph determined by  $C_1 \cup C_2$ , which is connected since all the communities are connected. Finally, we divide the train and test sets by enforcing test examples to contain disjoint communities from those in the training set. In this experiment, due to computational limitations, we restrict our attention to the three smallest graphs in the SNAP collection (Youtube, DBLP and Amazon), and we restrict the largest community size to 800 nodes, which is a conservative bound, since the average community size on these graphs is below 30. We compare GNN’s performance with the Community-Affiliation Graph Model (AGM). The AGM is a generative model defined in (Yang & Leskovec, 2012b) that allows for overlapping communities where overlapping area have higher density. This was a statistical property observed in many real datasets with ground truth communities, but not present in generative models before AGM and was shown to outperform algorithms before that. AGM fits the data to the model parameters in order give community predictions. Table 1 compares the performance, measured with a 3-class  $\{1, 2, 1+2\}$  classification accuracy up to global permutation  $1 \leftrightarrow 2$ . It illustrates the benefits of data-driven models that strike the right balance between expressive power to adapt to model misspecifications and structural assumptions of the task at hand.

## 7. Conclusion

In this work we have studied data-driven approaches to clustering with graph neural networks. Our results confirm that, even when the signal-to-noise ratio is at the lowest

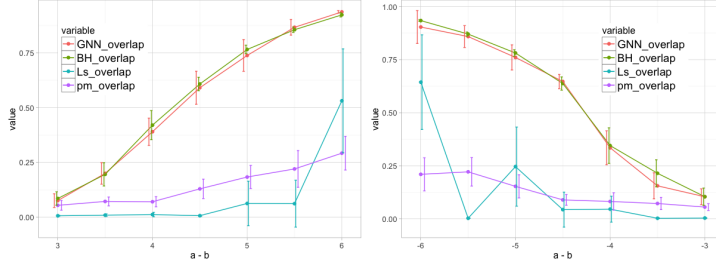


Figure 2. SBM detection. *left*:  $k = 2$  associative, *right*:  $k = 2$  disassociative, X-axis corresponds to SNR, Y-axis to overlap; see text.

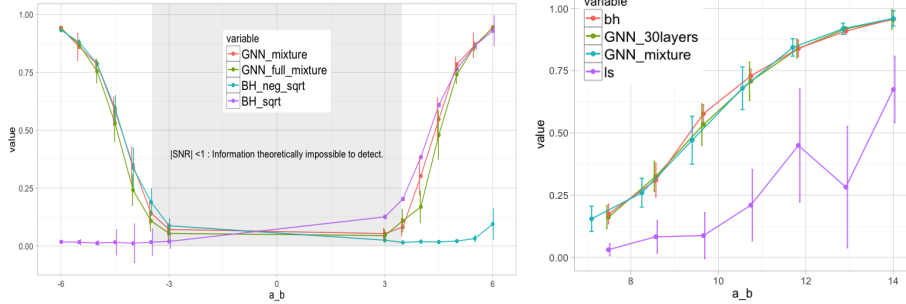


Figure 3. GNN mixture (Graph Neural Network trained on a mixture of SBM with average degree 3), GNN full mixture (GNN trained over different SNR regimes some below threshold),  $BH(\sqrt{\bar{d}})$  and  $BH(-\sqrt{\bar{d}})$ . *left*:  $k = 2$ , *right*:  $k = 4$ . We verify that  $BH(r)$  models cannot perform detection at both ends of the spectrum simultaneously.

Table 1. Snap Dataset Performance Comparison between GNN and AGM

Dataset	Subgraph Instances			Overlap Comparison	
	(train/test)	Avg Vertices	Avg Edges	GNN	AGMFit
Amazon	315 / 35	60	346	<b>0.74 ± 0.13</b>	<b>0.76 ± 0.08</b>
DBLP	2831 / 510	26	164	<b>0.78 ± 0.03</b>	0.64 ± 0.01
Youtube	48402 / 7794	61	274	<b>0.9 ± 0.02</b>	0.57 ± 0.01

Table 2. Overlap performance of different GNN models for SBM model with  $k = 5$ ,  $p = 0$ ,  $q = 18$ , corresponding to average degree  $\bar{d} = 14.5$ .

$n = 10^3$	$G$	$\{G, L(G)\}$	BP
Overlap	$29.5 \pm 0.5$	$30.1 \pm 0.5$	$30.4 \pm 3$

Table 3. Overlap performance of the GNN model on the Geometric Block Model compared with several Spectral Approaches.

Model	$S = 1$	$S = 2$	$S = 4$
Norm. Laplacian	$51 \pm 0.5$	$51 \pm 0.6$	$51 \pm 1$
Bethe Hessian	$59 \pm 1$	$69 \pm 1$	$69 \pm 2$
GNN on $G$	$59.5 \pm 0.4$	$72 \pm 0.5$	$86.5 \pm 0.5$

detectable regime, it is possible to backpropagate detection errors through a graph neural network that can ‘learn’ to extract the spectrum of an appropriate operator. This is made possible by considering generators that span the appropriate family of graph operators that can operate in sparsely connected graphs. One word of caution is that

obviously our results are inherently non-asymptotic, and further work is needed in order to confirm that learning is still possible as  $|V|$  grows. Nevertheless, our results open up interesting questions, namely understanding the energy landscape that our model traverses as a function of signal-to-noise ratio; or whether the network parameters can be interpreted mathematically. This could be useful in the study of computational-to-statistical gaps, where our model could be used to inquire about the form of computationally tractable approximations.

Besides such theoretical considerations, we are also interested in pursuing further applications with our model, owing to its good computational complexity  $|V| \log(|V|)$ . So far it presumes the number of communities to be estimated, so we will explore generalisations to also estimate it to large-scale graphs. Also, our model can readily be applied to data-driven ranking tasks.



## References

- Abbe, Emmanuel. Community detection and stochastic block models: recent developments. *arXiv preprint arXiv:1703.10146*, 2017.
- Abbe, Emmanuel, Bandeira, Afonso S., and Hall, Georgina. Exact recovery in the stochastic block model. *arXiv:1405.3267v4*, 2014.
- Bronstein, Michael M, Bruna, Joan, LeCun, Yann, Szlam, Arthur, and Vandergheynst, Pierre. Geometric deep learning: going beyond euclidean data. *IEEE Signal Processing Magazine*, 2017.
- Bruna, Joan, Zaremba, Wojciech, Szlam, Arthur, and LeCun, Yann. Spectral networks and locally connected networks on graphs. *arXiv:1312.6203.*, 2013.
- Decelle, Aurelien, Krzakala, Florent, Moore, Cristopher, and Zdeborová, Lenka. Asymptotic analysis of the stochastic block model for modular networks and its algorithmic applications. *Physical Review E*, 84(6):066106, 2011.
- Defferrard, M., Bresson, X., and Vandergheynst, P. Convolutional neural networks on graphs with fast localized spectral filtering. In *Proc. NIPS*, 2016.
- Duvenaud, David K, Maclaurin, Dougal, Iparraguirre, Jorge, Bombarell, Rafael, Hirzel, Timothy, Aspuru-Guzik, Alán, and Adams, Ryan P. Convolutional networks on graphs for learning molecular fingerprints. In *Proc. NIPS*, 2015.
- Gilmer, Justin, Schoenholz, Samuel S., Riley, Patrick F., Vinyals, Oriol, and Dahl, George E. Neural message passing for quantum chemistry. *arXiv:1704.01212v1*, 2017.
- Gori, M., Monfardini, G., and Scarselli, F. A new model for learning in graph domains. In *Proc. IJCNN*, 2005.
- Gregor, Karol and LeCun, Yann. Learning fast approximations of sparse coding. *ICML*, 2010.
- Hamilton, Will, Ying, Zhitaio, and Leskovec, Jure. Inductive representation learning on large graphs. In *Advances in Neural Information Processing Systems*, pp. 1025–1035, 2017.
- He, Kaiming, Zhang, Xiangyu, Ren, Shaoqing, and Sun, Jian. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 770–778, 2016.
- Ioffe, Sergey and Szegedy, Christian. Batch normalization: Accelerating deep network training by reducing internal covariate shift. *arXiv preprint arXiv:1502.03167*, 2015.
- Karp, Richard M. The probabilistic analysis of some combinatorial search algorithms. *Algorithms and complexity: New directions and recent results*, 1:19, 1976.
- Kingma, Diederik and Ba, Jimmy. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- Kipf, Thomas N and Welling, Max. Semi-supervised classification with graph convolutional networks. *arXiv preprint arXiv:1609.02907*, 2016.
- Kondor, Risi, Son, Hy Truong, Pan, Horace, Anderson, Brandon, and Trivedi, Shubhendu. Covariant compositional networks for learning graphs. *arXiv preprint arXiv:1801.02144*, 2018.
- Krzakala, Florent, Moore, Cristopher, Mossel, Elchanan, Neeman, Joe, Sly, Allan, Zdeborová, Lenka, and Zhang, Pan. Spectral redemption in clustering sparse networks. *Proceedings of the National Academy of Sciences*, 110(52):20935–20940, 2013.
- Li, Yujia, Tarlow, Daniel, Brockschmidt, Marc, and Zemel, Richard. Gated graph sequence neural networks. *arXiv:1511.05493*, 2015.
- Mossel, Elchanan, Neeman, Joe, and Sly, Allan. A proof of the block model threshold conjecture. *arXiv:1311.4115*, 2014.
- Mossel, Elchanan, Neeman, Joe, and Sly, Allan. A proof of the block model threshold conjecture. *arXiv:1311.4115*, 2016.
- Newman, Mark EJ. Modularity and community structure in networks. *Proceedings of the national academy of sciences*, 103(23):8577–8582, 2006.
- Riordan, Oliver and Wormald, Nicholas. The diameter of sparse random graphs. *Combinatorics, Probability and Computing*, 19(5-6):835–926, 2010.
- Saade, Alaa, Krzakala, Florent, and Zdeborová, Lenka. Spectral clustering of graphs with the bethe hessian. In *Advances in Neural Information Processing Systems*, pp. 406–414, 2014.
- Sankararaman, Abishek and Baccelli, François. Community detection on euclidean random graphs. In *Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium on Discrete Algorithms*, pp. 2181–2200. SIAM, 2018.
- Scarselli, Franco, Gori, Marco, Tsoi, Ah Chung, Hagenbuchner, Markus, and Monfardini, Gabriele. The graph neural network model. *IEEE Trans. Neural Networks*, 20(1):61–80, 2009.
- Spielman, Dan. Spectral graph theory, am 561, cs 662, 2015.

- Sukhbaatar, Sainbayar, Szlam, Arthur, and Fergus, Rob. Learning multiagent communication with backpropagation. *NIPS*, 2016.
- Velickovic, Petar, Cucurull, Guillem, Casanova, Arantxa, Romero, Adriana, Lio, Pietro, and Bengio, Yoshua. Graph attention networks. *stat*, 1050:20, 2017.
- Yang, Jaewon and Leskovec, Jure. Defining and evaluating network communities based on ground-truth. *ICDM.*, 7(2):43–55, 2012a.
- Yang, Jaewon and Leskovec, Jure. Community-affiliation graph model for overlapping network community detection. *Proceeding ICDM '12 Proceedings of the 2012 IEEE 12th International Conference on Data Mining*, 390(.):1170–1175, 2012b.
- Yedidia, Jonathan S, Freeman, William T, and Weiss, Yair. Understanding belief propagation and its generalizations. *Exploring artificial intelligence in the new millennium*, 8, 2003a.
- Yedidia, Jonathan S, Freeman, William T, and Weiss, Yair. Understanding belief propagation and its generalizations. *Exploring artificial intelligence in the new millennium*, 8: 236–239, 2003b.
- Zhang, Pan. Robust spectral detection of global structures in the data by learning a regularization. In *Arxiv preprint*, pp. 541–549, 2016.